

Orezone Reports Positive Drill Results at Bomboré Demonstrating Growth Potential Ahead of Mineral Resource and Reserve Update in Q1 2027

August 11, 2026 – Vancouver, BC - Orezone Gold Corporation (TSX: ORE | ASX: ORE | OTCQX: ORZCF) (the “Company” or “Orezone”) is pleased to provide additional drill results from its Bomboré Gold Mine. The latest results are from multiple zones across the 14-kilometre-long reserve-defined Bomboré gold system.

Selected Drill Highlights¹:

-
- | | |
|---|---|
| • 2.97g/t over 34.0m (BBD1393)
<i>Incl. 4.50g/t over 7.0m</i> | • 1.74g/t over 26.0m (BBD1437)
<i>Incl. 3.33g/t over 6.0m</i> |
| • 4.00g/t over 11.3m (BBD1409) | • 8.34g/t over 6.0m (BBD1418) |
| • 1.26g/t over 34.0m (BBD1430)
<i>Incl. 5.46g/t over 2.0m</i> | • 1.39g/t over 19.0m (BBD1408)
<i>Incl. 4.97g/t over 3.0m</i> |
| • 4.28g/t over 11.0m (BBD1393) | • 223.25g/t over 1.0m (BBD1437) |
| • 9.14g/t over 3.30m (BBD1411) | • 4.88g/t over 4.60m (BBD1414) |
| • 1.64g/t over 15.0m (BBD1394) | • 1.81g/t over 13.0m (BBD1392) |
| • 1.28g/t over 16.6m (BBD1402) | • 1.70g/t over 12.0m (BBD1430) |
-

Patrick Downey, President and CEO, commented *“These latest exploration drill results continue to demonstrate the growth potential at Bomboré, confirming the continuity of gold mineralization beyond the current Mineral Resources and Mineral Reserves.*

Step-out drilling continues to highlight significant exploration upside along strike, demonstrated by follow-up drilling at P16, that confirmed the zone’s 600 metre strike extension and its overall sub-parallel orientation to the P17 high-grade trend. As with P17, the emerging P16 trend hosts notably higher-grade zones within a broader envelope of lower grade mineralization. Ongoing structural studies and future exploration drilling will focus on refining the controls and continuity of these higher-grade zones, which are potentially amenable to underground mining and could significantly enhance the production profile.

In addition to our successful expansion drilling programs, the 2026 resource definition program focused on converting Inferred Resource to the Indicated category, supporting a Mineral Resource and Mineral Reserve update which is expected to be released in the first quarter of 2027. The updated estimate will incorporate the results of approximately 100,000m of additional drilling, in addition to an adjusted cut-off grade reflective of current operating costs and higher gold prices. Given Orezone’s ongoing exploration success in extending mineralization to depth and along strike, we expect that the new estimate will yield a material increase to both Mineral Resources and Mineral Reserves, further extending the overall life-of-mine at Bomboré”.

1. Results are from multiple zones, are uncapped, and have variable true widths. See Section 2 of release for per zone estimated true widths.

Exploration Drilling Results

Follow-up drilling at P16 was successful in confirming the P16 strike extension, which has now been traced over 600 metres to the northeast of the established P16 Mineral Resource. This newly emerging trend is subparallel to the established P17 Trend, located approximately 1 kilometre to the southeast. As with the P17 Trend, P16 hosts notably higher-grade zones, with mineralization plunging at 25 degrees to the north-northeast, parallel to the axes of tight folds in quartz veins. Follow-up drilling at P16 will look to both delineate mineralization along the broader trend, as well as to further refine the continuity of the higher-grade zones with increasingly tighter drill spacing.

The P16 strike extension is a significant discovery that has broader implications in terms of future resource growth within the Bomboré gold system. P16 strike extension was not previously recognized as a prospective target because of the approximately eight metres of Tertiary cover that masks the underlying mineralization. This recent finding opens up multiple areas under cover that were not previously advanced due to the absence of surficial geochemical anomalies.

P16 selected intercepts – 600 metres northeast of established P16 resource:

8.34g/t over 6.0m (BBD1418)	4.88g/t over 4.6m (BBD1414)
27.31g/t over 1.0m (BBD1405)	2.83g/t over 6.0m (BBD1405)
4.37g/t over 2.4m (BBD1422)	12.50g/t over 1.0m (BBC7353)

Previously reported – selected high-grade intercepts from P16 area:

10.63g/t over 14.0m (BBD0448)	16.50g/t over 5.0m (BBD0448)
9.03g/t over 12.0m (BBC3241)	6.69g/t over 15.5m (BBD0443)
5.91g/t over 15.0m (BBD0477)	7.82g/t over 9.0m (BBD0213)
58.91g/t over 3.0m (BBD0768)	25.87g/t over 1.0m (BBD0813)

Resource Definition Drill Results

For 2026, Orezone has budgeted approximately 65,000m of drilling at Bomboré, with 45,000 metres dedicated to resource definition drilling. The definition program follows more recent 100 metre-spaced step-out drilling, which was successful in extending gold mineralization below several of the current life-of-mine resource pits. Targeted infill drilling is expected to expand the existing resource base, with future pit optimizations potentially extending pit boundaries further down depth and along strike.

Further to the planned 2026 step-out and resource definition drill programs, mineralization at Bomboré remains open at depth and along strike. To date, the broader mineralized system has been traced across a continuous 14-kilometre strike length, with Mineral Reserves to an average depth of less than 40 metres and Mineral Resources to an average depth of approximately 70 metres. Future definition drilling at Bomboré will be focused on delineating higher-grade centers of mineralization, with the potential to be sequenced into the near-term mine plan, supporting further growth in production and operating cash flow.

North Zone selected intercepts:

2.97g/t over 34.0m (BBD1393)

Incl. 4.50g/t over 7.0m

4.28g/t over 11.0m (BBD1393)

1.81g/t over 13.0m (BBD1392)

1.05g/t over 12.4m (BBD1395)

1.64g/t over 15.0m (BBD1394)

Incl. 2.31g/t over 4.0m

1.06g/t over 31.2m (BBD1394)

Incl. 2.62g/t over 4.0m

3.27g/t over 5.0m (BBC7295)

P17 selected intercepts:

1.26g/t over 34.0m (BBD1430)

Incl. 5.46g/t over 2.0m

4.00g/t over 11.3m (BBD1409)

1.70g/t over 12.0m (BBD1430)

1.39g/t over 19.0m (BBD1408)

Incl. 4.97g/t over 3.0m

9.14g/t over 3.3m (BBD1411)

4.92g/t over 3.0m (BBD1429)

Siga selected intercepts:

1.74g/t over 26.0m (BBD1437)

Incl. 3.33g/t over 6.0m

223.25g/t over 1.0m (BBD1437)

1.09g/t over 13.4m (BBD1439)

1.08g/t over 27.2m (BBD1438)

Incl. 1.60g/t over 13.0m

2.96g/t over 7.0m (BBD1440)

P8P9 selected intercepts:

1.28g/t over 16.6m (BBD1402)

Incl. 3.01g/t over 3.0m

1.09g/t over 11.30m (BBD1401)

2.07g/t over 7.0m (BBC7341)

Figure 1 – Bomboré Plan Map Highlighting Selected Intercepts

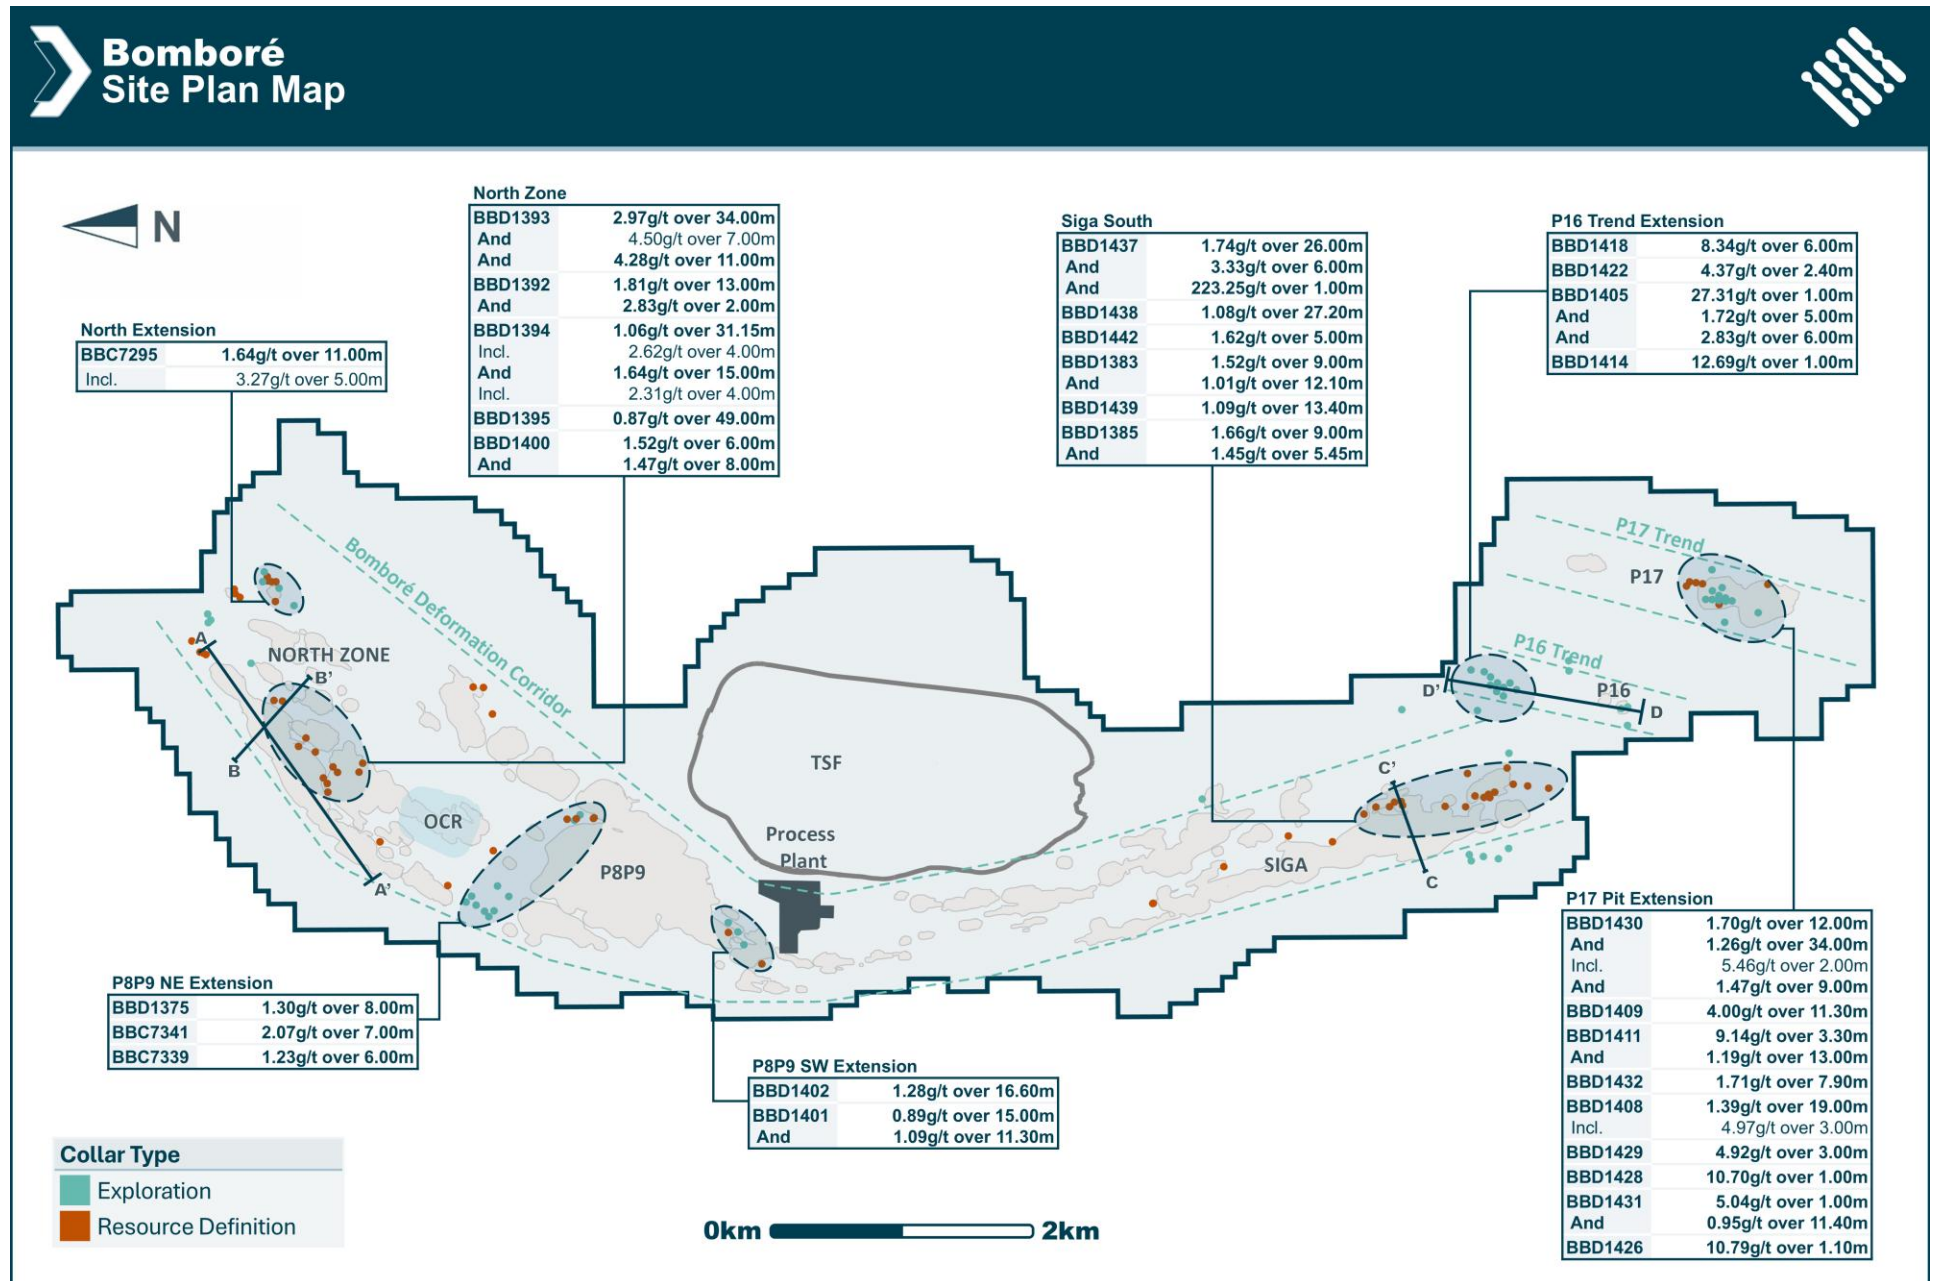


Figure 2 – North Zone Long Section

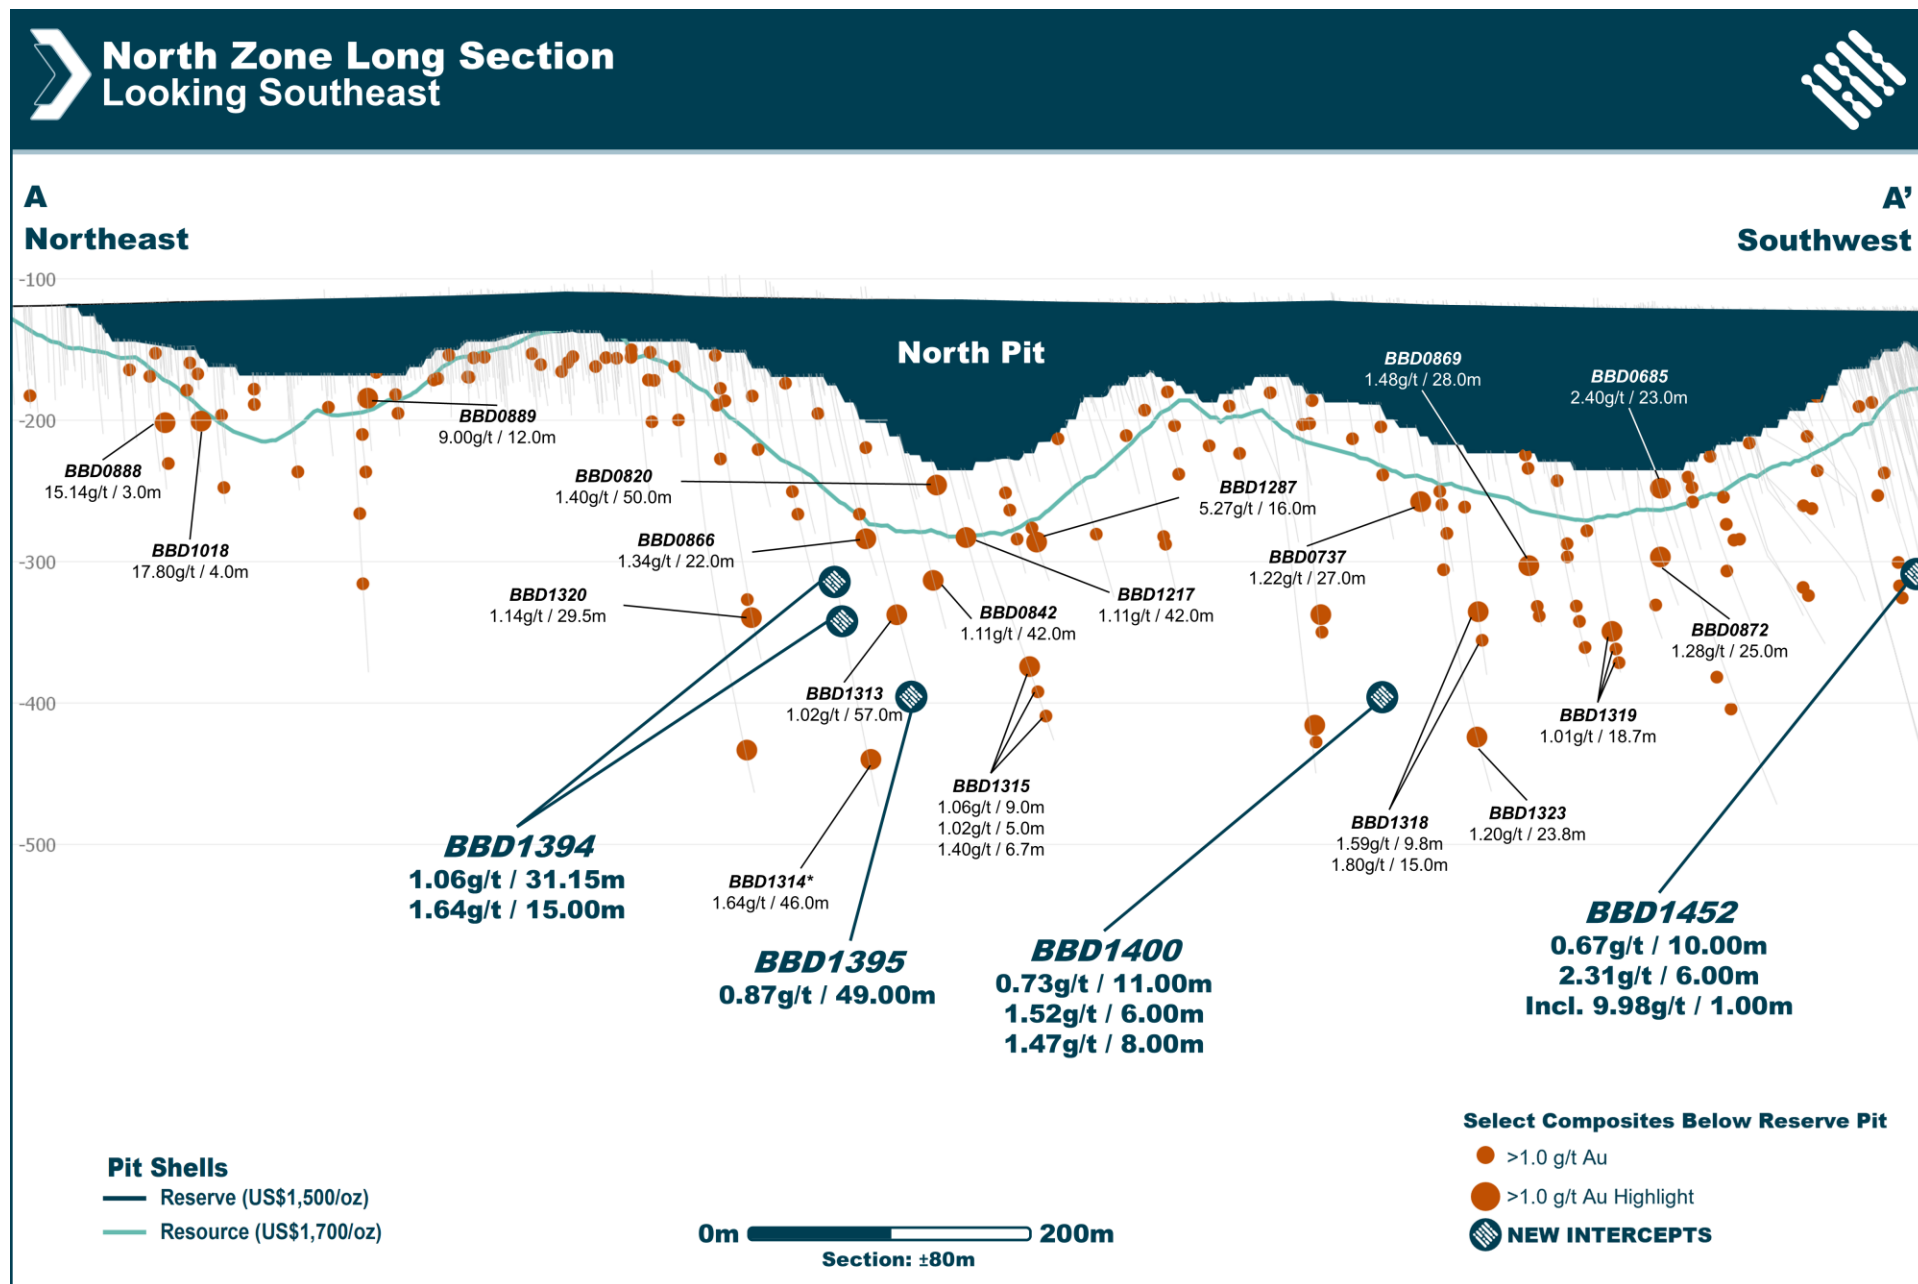


Figure 3 – North Zone Cross Section

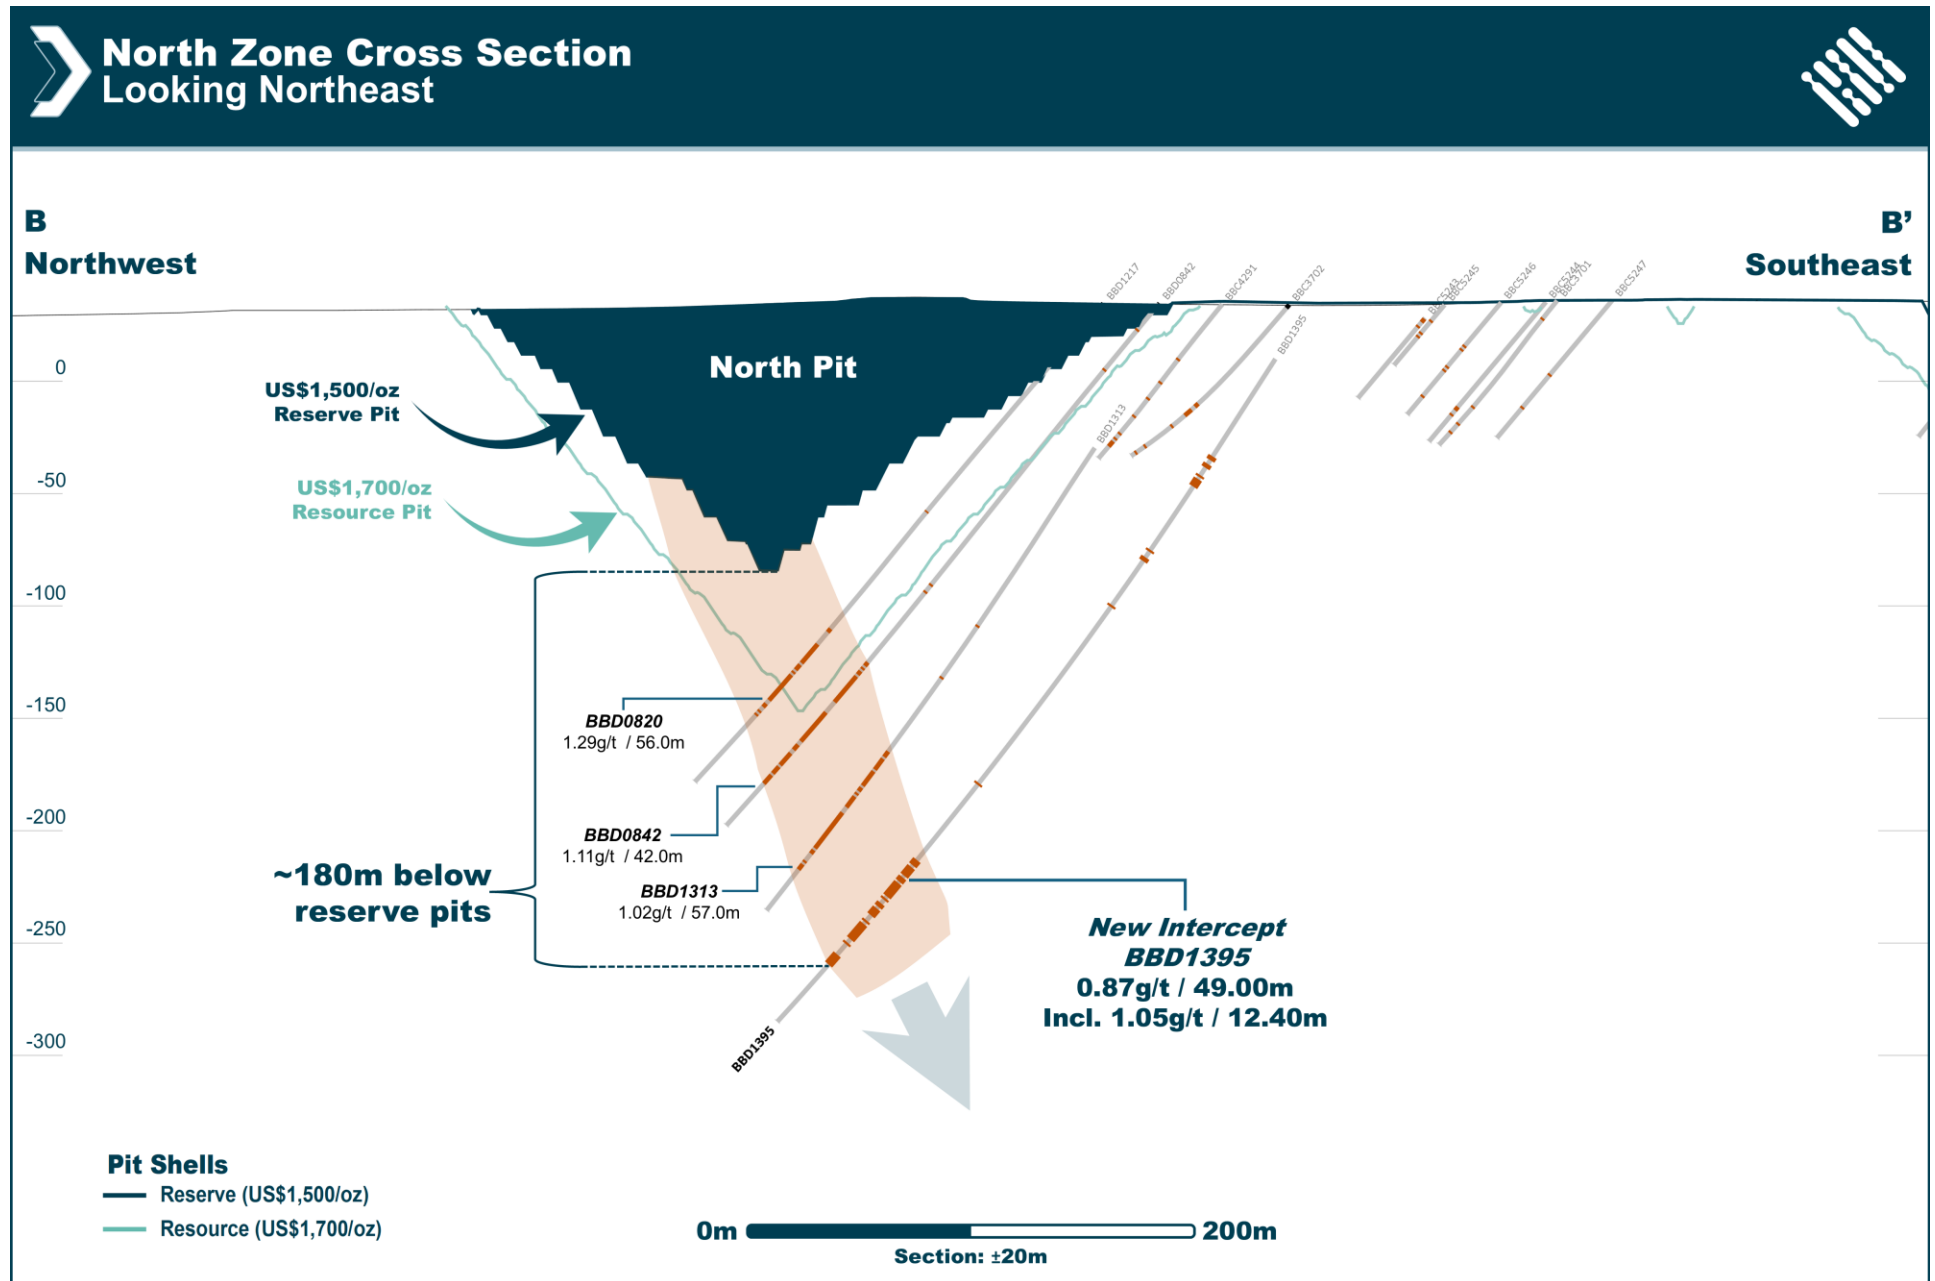


Figure 4 – Siga South Cross Section

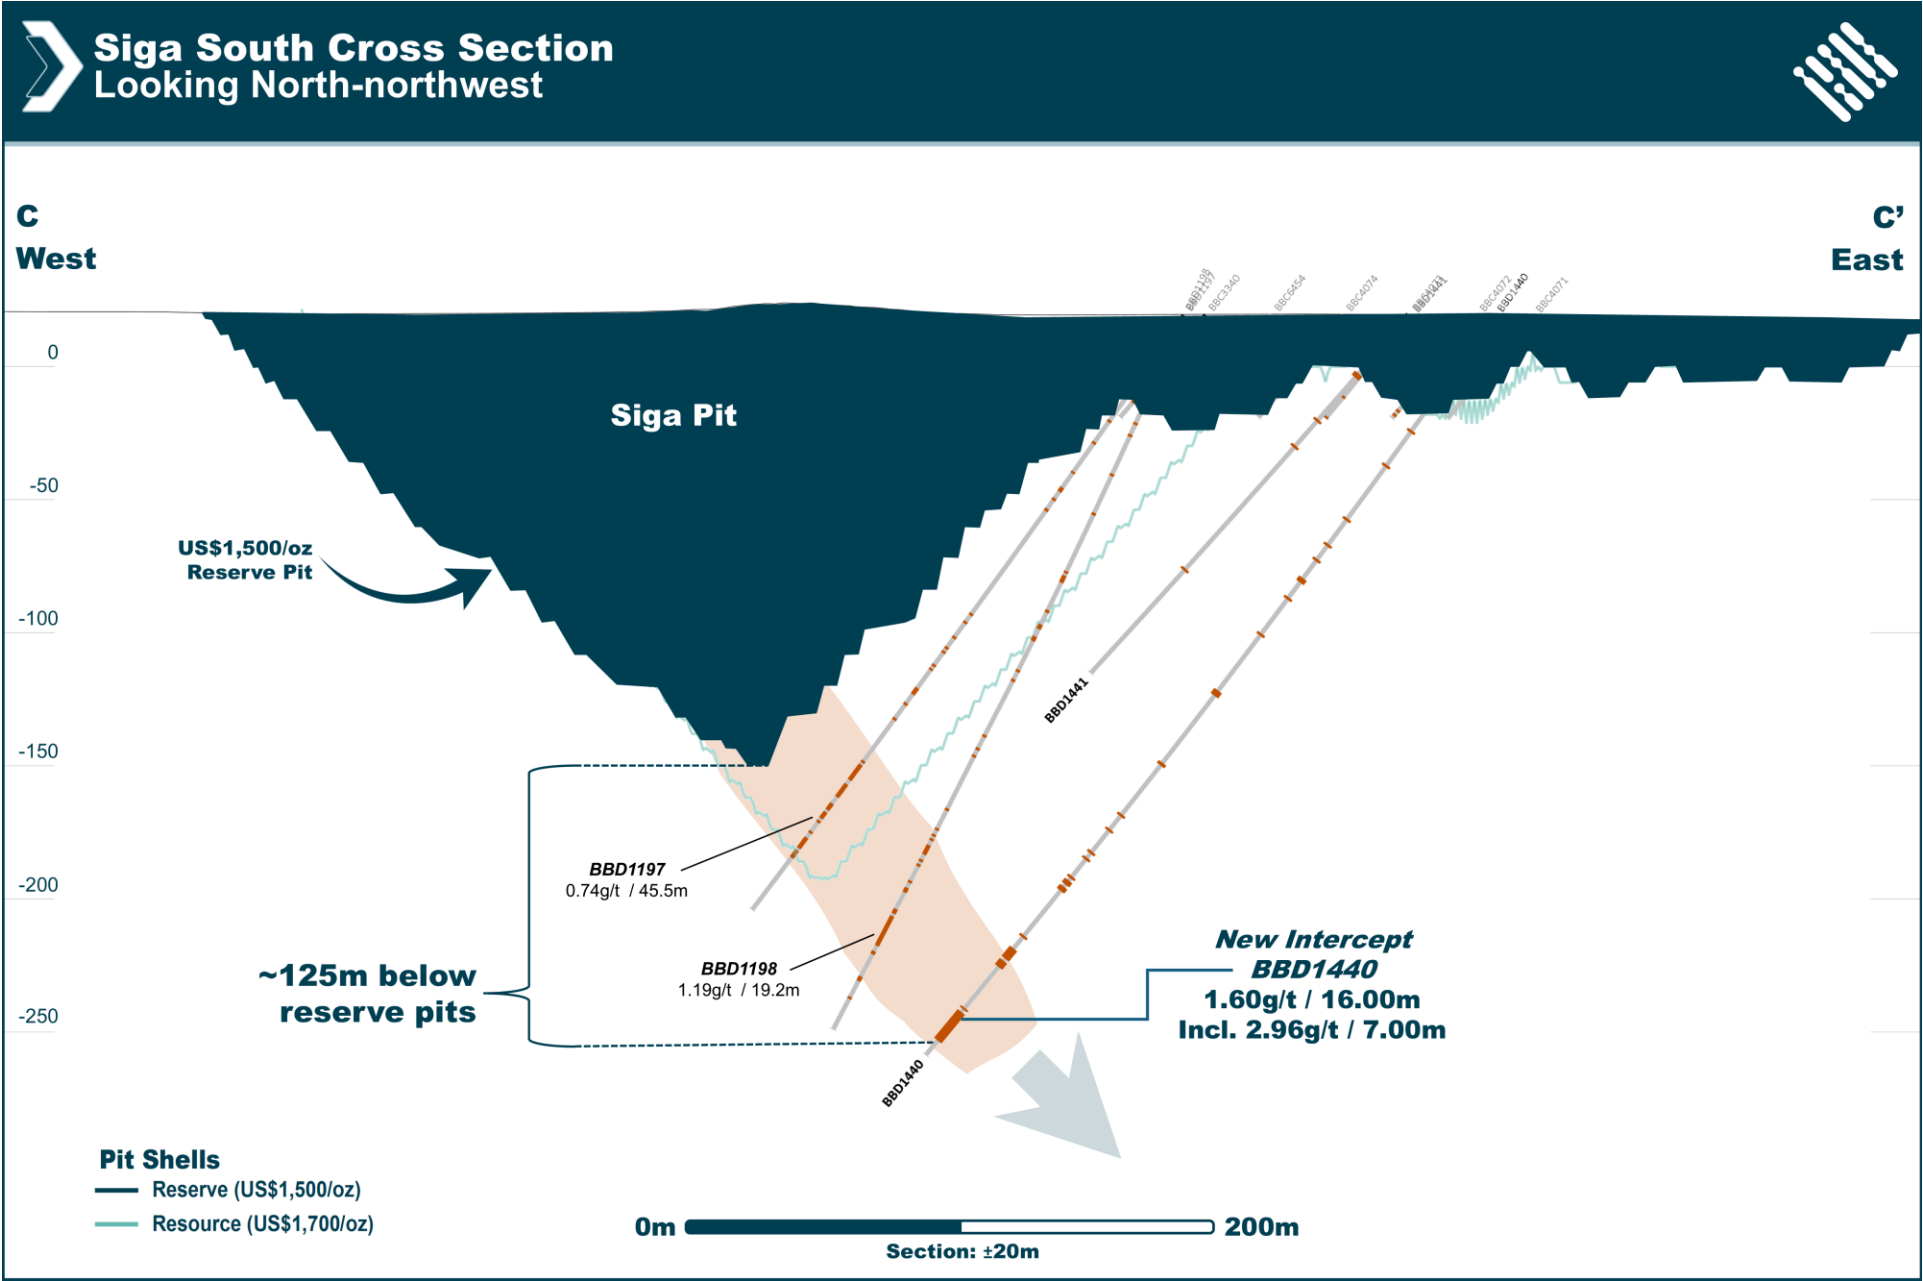


Figure 5 – P16 Long Section

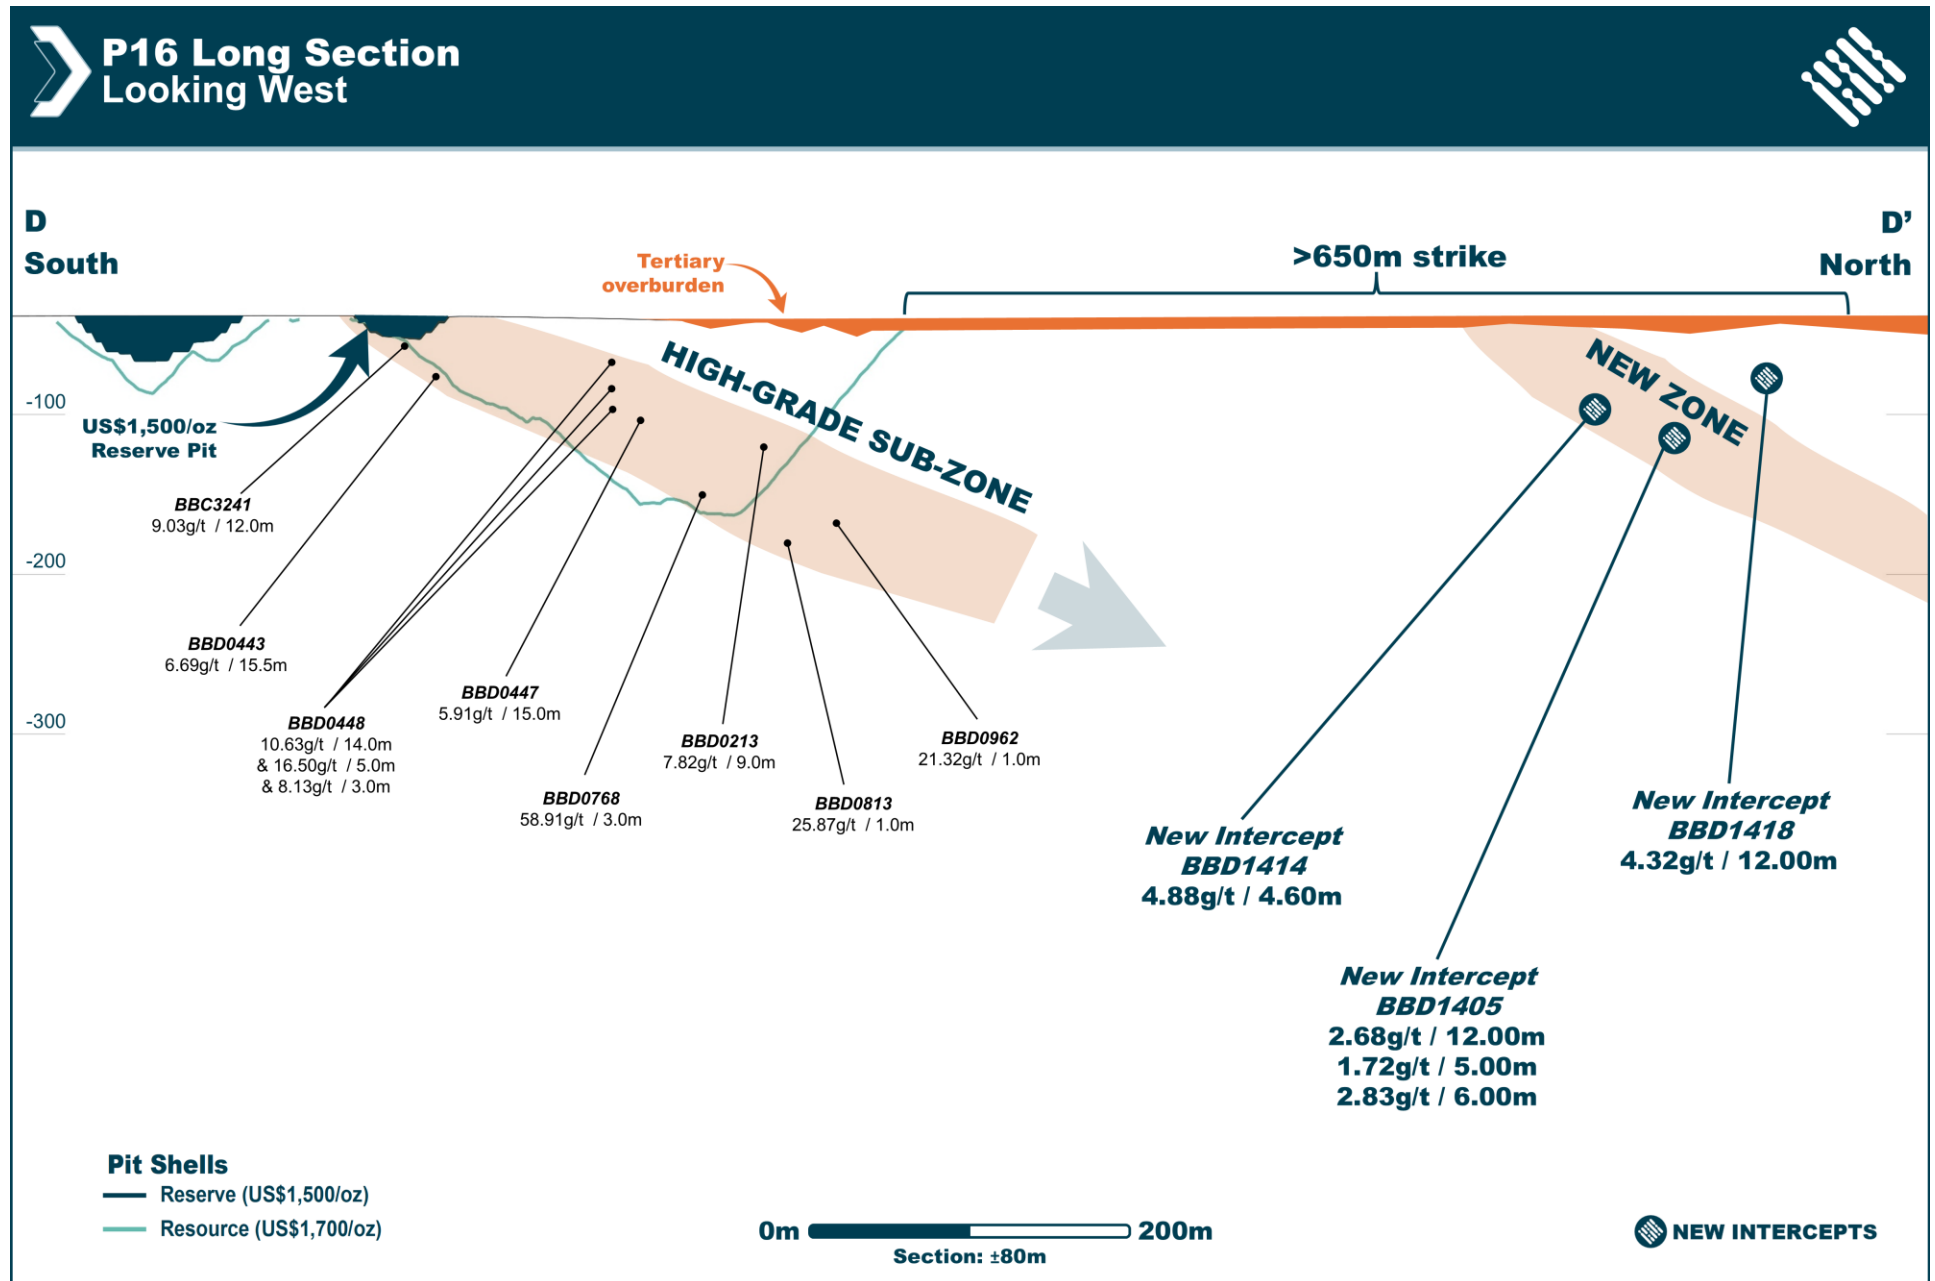


Table 1 – Drill Results Table

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
BBC7271	CFU	729342	1352598	270	-50	312	70	9.00	12.00	3.00	0.87	OX
And								28.00	33.00	5.00	0.22	OX
BBC7272	CFU	729549	1352745	274	-50	312	111	0.00	5.00	5.00	0.43	OX
And								9.00	12.00	3.00	0.52	OX
And								19.00	25.00	6.00	0.39	OX
And								57.00	61.00	4.00	0.79	HR
And								78.00	84.00	6.00	0.80	HR
And								92.00	95.00	3.00	0.52	HR
And								107.00	111.00	4.00	0.33	HR
BBC7273	NORTH	728028	1352940	268	-50	312	132	15.00	20.00	5.00	1.40	OX
And								54.00	57.00	3.00	0.51	OX
And								68.00	77.00	9.00	0.28	OX
And								87.00	91.00	4.00	0.30	HR
And								117.00	120.00	3.00	0.97	HR
BBC7274	CFU	729545	1352666	272	-50	310	102	43.00	48.00	5.00	0.20	HR
And								90.00	93.00	3.00	0.46	HR
BBC7275	SIGA S	728233	1344889	267	-50	253	80	9.00	13.00	4.00	0.35	OX
And								22.00	26.00	4.00	0.24	OX
BBC7276	SIGA S	728250	1345004	269	-49	254	72	17.00	22.00	5.00	0.99	OX
And								43.00	47.00	4.00	0.26	HR
BBC7277	SIGA S	728218	1345098	270	-50	254	60	3.00	6.00	3.00	0.32	OX
BBC7278	SIGA S	728265	1345113	271	-49	254	70	11.00	14.00	3.00	0.35	OX
And								21.00	25.00	4.00	0.27	OX
BBC7279	SIGA S	728313	1344811	266	-49	252	80				NSR	
BBC7280	SIGA S	728887	1345126	264	-49	255	120	65.00	73.00	8.00	0.31	HR
BBC7281	NORTH	729817	1354838	279	-50	312	50	26.00	31.00	5.00	0.26	OX
BBC7282	NORTH	729798	1354793	280	-50	312	80	NSR			NSR	
BBC7283	NORTH	729901	1354901	277	-50	314	130	39.00	44.00	5.00	1.24	OX
BBC7284	NORTH	730108	1354780	277	-50	312	125	89.00	94.00	5.00	0.36	HR
And								106.00	110.00	4.00	0.29	HR
BBC7285	NORTH	730042	1354776	277	-50	311	60				NSR	
BBC7286	NORTH	730062	1354756	277	-48	315	100	18.00	26.00	8.00	0.35	OX
And								36.00	39.00	3.00	0.35	OX
BBC7287	NORTH	730394	1354323	278	-50	313	100	15.00	19.00	4.00	0.41	OX
And								26.00	29.00	3.00	0.83	OX
BBC7288	NORTH	730431	1354346	276	-50	312	100	18.00	39.00	21.00	0.47	OX
Incl.								34.00	36.00	2.00	1.18	OX
Incl.								31.00	38.00	7.00	0.64	OX
And								62.00	66.00	4.00	0.45	HR
BBC7289	NORTH	730173	1354118	282	-48	315	120				NSR	
BBC7290	NORTH	730204	1354261	280	-49	315	60				NSR	
BBC7291	NORTH	730306	1354233	281	-48	314	120				NSR	
BBC7292	NORTH	729809	1354814	279	-51	318	75				NSR	
BBC7293	NORTH	730265	1354570	277	-50	312	80	3.00	10.00	7.00	0.34	OX
BBC7294	NORTH	730356	1354257	280	-50	317	120	11.00	14.00	3.00	3.12	OX
Incl.								12.00	13.00	1.00	8.15	OX
BBC7295	NORTH	730356	1354290	280	-50	313	80	48.00	59.00	11.00	1.64	HR
Incl.								50.00	55.00	5.00	3.27	HR
And								63.00	70.00	7.00	0.90	HR
BBC7296	NORTH	730361	1354319	280	-51	317	80	38.00	43.00	5.00	0.19	OX
And								60.00	70.00	10.00	0.85	HR
BBC7297	NORTH	730356	1354358	279	-51	315	65	0.00	7.00	7.00	0.25	OX
BBC7298	NORTH	730236	1354533	277	-50	314	80				NSR	
BBC7299	NORTH	730299	1354577	279	-52	314	100	33.00	42.00	9.00	0.86	OX
BBC7333	NORTH	729731	1354447	287	-50	312	100	49.00	55.00	6.00	0.40	HR
And								80.00	85.00	5.00	0.43	HR

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
BBC7335	NORTH	730609	1354260	276	-51	313	130	64.00	67.00	3.00	0.84	HR
BBC7339	P8P9	727790	1352625	267	-49	313	99	28.00	35.00	7.00	0.99	OX
And								80.00	86.00	6.00	1.23	HR
Incl.								80.00	81.00	1.00	4.91	HR
BBC7340	P8P9	727834	1352585	267	-50	312	140	96.00	100.00	4.00	0.42	HR
BBC7341	P8P9	727945	1352472	267	-50	315	80	17.00	45.00	28.00	0.89	OX
Incl.								37.00	44.00	7.00	2.07	OX
BBC7342	P8P9	728025	1352559	266	-50	312	80	36.00	43.00	7.00	0.33	HR
BBC7343	P8P9	727831	1352658	267	-50	312	54	13.00	16.00	3.00	0.59	OX
BBC7344	P8P9	727878	1352722	267	-50	312	120	45.00	50.00	5.00	0.31	OX
BBC7345	P8P9	727947	1352757	267	-50	312	150	118.00	123.00	5.00	0.56	HR
BBC7346	P8P9	727902	1352799	267	-49	313	80	39.00	42.00	3.00	0.40	OX
BBC7347	NORTH	728295	1352591	266	-48	312	100	48.00	53.00	5.00	0.42	HR
BBC7348	P16	729673	1344348	260	-50	270	94					NSR
BBC7349	P16	729750	1344350	260	-50	270	95					NSR
BBC7350	P17 S	730181	1343198	260	-50	270	72					NSR
BBC7351	P16	729255	1343900	261	-50	270	104	10.00	14.00	4.00	0.70	OX
BBC7352	P16	729383	1343948	262	-50	270	100					NSR
BBC7353	P16	729396	1343899	262	-50	270	67	3.00	23.00	20.00	1.06	OX
Incl.								9.00	10.00	1.00	12.50	OX
And								39.00	44.00	5.00	0.57	OX
And								50.00	54.00	4.00	0.46	HR
BBD1374	SIGA E	728691	1347159	274	-48	252	252	111.00	114.00	3.00	1.46	HR
And								197.00	201.00	4.00	1.07	HR
And								205.00	210.00	5.00	0.84	HR
BBD1375	P8P9	728540	1351955	269	-50	310	309	2.00	17.00	15.00	0.67	OX
Incl.								8.00	10.00	2.00	1.75	OX
And								22.00	28.50	6.50	0.71	OX
And								151.10	179.00	27.90	0.83	HR
Incl.								170.00	178.00	8.00	1.30	HR
BBD1376	P8P9	727428	1350533	302	-51	312	252	46.00	49.00	3.00	2.55	HR
BBD1377	SIGA E	728408	1346499	266	-50	250	375	153.25	156.40	3.15	0.55	HR
And								193.30	206.15	12.85	0.69	HR
And								243.00	248.00	5.00	0.64	HR
And								256.00	260.10	4.10	0.31	HR
And								279.00	288.00	9.00	0.69	HR
And								293.00	298.00	5.00	0.43	HR
BBD1378	SIGA S	728791	1344665	261	-58	248	255	149.40	153.10	3.70	0.39	HR
BBD1379	SIGA S	728632	1345724	270	-50	249	354	98.10	101.45	3.35	0.79	HR
And								195.00	202.00	7.00	0.46	HR
And								253.00	256.00	3.00	0.70	HR
And								293.60	299.00	5.40	0.75	HR
And								305.20	322.00	16.80	0.75	HR
Incl.								306.00	315.00	9.00	0.99	HR
BBD1380	P8P9	728536	1352025	268	-50	311	252	132.10	135.90	3.80	1.40	HR
BBD1382	P8P9	728542	1351824	270	-52	312	372	267.00	272.00	5.00	0.88	HR
And								278.00	286.00	8.00	0.47	HR
And								316.01	322.00	5.90	0.64	HR
And								332.00	339.00	7.00	0.65	HR
BBD1383	SIGA S	728667	1345686	268	-51	252	372	136.15	143.00	6.85	0.58	HR
And								265.00	270.00	5.00	0.64	HR
And								274.00	280.00	6.00	0.98	HR
And								293.00	298.00	5.00	0.75	HR
And								317.00	320.00	3.00	0.63	HR
And								324.00	333.00	9.00	1.52	HR
Incl.								235.00	241.00	6.00	2.01	HR
And								339.00	351.10	12.10	1.01	HR
Incl.								345.00	350.10	5.10	1.76	HR
BBD1384	SIGA S	728632	1345140	267	-46	250	228	12.00	16.00	4.00	0.53	OX
And								182.00	191.80	9.80	0.87	HR
BBD1385	SIGA S	728715	1345068	270	-49	253	285	9.30	13.10	3.80	1.21	OX

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
And								17.00	25.00	8.00	0.61	OX
And								83.00	86.00	3.00	0.52	HR
And								136.00	141.15	5.15	0.59	HR
And								154.00	163.00	9.00	1.66	HR
Incl.								154.00	158.00	4.00	2.75	HR
And								208.00	214.30	6.30	0.53	HR
And								217.55	223.00	5.45	1.45	HR
Incl.								222.15	223.00	0.85	6.66	HR
And								229.85	235.00	5.15	0.70	HR
BBD1386	SIGA S	728805	1344776	262	-50	250	267	19.80	24.00	4.20	0.78	OX
And								208.00	213.00	5.00	0.60	HR
BBD1387	SIGA S	728727	1344965	264	-50	251	241	6.00	12.50	6.50	0.44	OX
And								121.00	134.00	13.00	0.76	HR
And								171.30	176.00	4.70	0.64	HR
And								194.00	198.00	4.00	0.39	HR
BBD1388	SIGA E	728172	1346993	274	-50	253	267	116.00	126.00	10.00	0.55	HR
And								141.00	147.00	6.00	0.75	HR
And								160.00	169.00	9.00	0.42	HR
And								197.00	203.10	6.10	0.47	HR
BBD1390	SIGA E	727891	1347537	275	-50	252	192	124.00	129.00	5.00	0.46	HR
And								141.00	144.00	3.00	0.38	HR
BBD1391	SIGA S	728928	1344823	262	-51	248	382	336.00	339.00	3.00	0.65	HR
BBD1392	NORTH	728965	1353592	278	-54	311	273	190.00	198.00	8.00	1.37	HR
Incl.								193.00	195.00	2.00	2.83	HR
And								205.00	218.00	13.00	1.81	HR
Incl.								205.00	210.00	5.00	2.57	HR
BBD1393	NORTH	728897	1353620	279	-50	313	252	2.10	6.70	4.60	0.73	OX
And								29.00	41.00	12.00	0.69	OX
And								149.00	183.00	34.00	2.97	HR
Incl.								152.00	159.00	7.00	4.50	HR
And								162.00	173.00	11.00	4.28	HR
And								219.50	225.20	5.70	2.08	HR
Incl.								219.50	222.00	2.50	3.15	HR
BBD1394	NORTH	729446	1354272	286	-55	311	327	43.00	50.00	7.00	0.71	HR
And								229.00	260.15	31.15	1.06	HR
Incl.								233.00	237.00	4.00	2.62	HR
And								270.00	285.00	15.00	1.64	HR
Incl.								277.00	281.00	4.00	2.31	HR
BBD1395	NORTH	729442	1354206	285	-57	311	399	81.00	87.00	6.00	0.78	HR
And								91.00	97.00	6.00	0.53	HR
And								131.00	137.00	6.00	0.50	HR
And								304.00	353.00	49.00	0.87	HR
Incl.								304.00	316.40	12.40	1.05	HR
And								359.00	364.90	5.90	0.83	HR
BBD1396	NORTH	729094	1354083	285	-54	312	297	117.00	141.00	24.00	0.64	HR
Incl.								140.00	141.00	1.00	3.39	HR
And								198.00	201.00	3.00	0.46	HR
BBD1397	NORTH	729051	1353955	284	-56	308	366	30.00	34.00	4.00	0.71	HR
And								73.00	76.50	3.50	0.61	HR
And								169.00	174.00	5.00	0.78	HR
And								198.00	204.00	6.00	0.71	HR
And								246.60	250.00	3.40	1.02	HR
And								305.00	308.00	3.00	0.64	HR
And								322.00	330.00	8.00	0.46	HR
And								343.10	348.00	4.90	0.51	HR
BBD1398	NORTH	728895	1353785	280	-50	312	189				NSR	
BBD1399	NORTH	728937	1353819	281	-50	309	396	91.00	95.00	4.00	0.30	HR
And								295.00	298.00	3.00	0.46	HR
And								345.00	353.00	8.00	0.75	HR
BBD1400	NORTH	729158	1354026	285	-56	313	405	5.00	10.00	5.00	0.47	OX
And								251.00	262.00	11.00	0.73	HR
And								312.00	318.00	6.00	1.52	HR

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
Incl.								312.00	315.00	3.00	1.90	HR
And								325.00	333.00	8.00	1.47	HR
Incl.								330.00	333.00	3.00	3.34	HR
BBD1401	P8P9	727744	1350791	287	-50	313	324	8.00	14.80	6.80	0.69	OX
And								70.00	79.00	9.00	0.88	HR
And								90.00	105.00	15.00	0.89	HR
Incl.								96.00	102.00	6.00	1.10	HR
And								142.00	165.00	23.00	0.49	HR
And								174.00	178.20	4.20	0.51	HR
And								187.00	193.00	6.00	0.53	HR
And								206.00	218.00	12.00	0.57	HR
And								249.00	282.00	33.00	0.66	HR
Incl.								252.70	264.00	11.30	1.09	HR
And								285.80	291.00	5.20	0.60	HR
BBD1402	P8P9	727672	1350717	292	-50	312	321	16.00	21.10	5.10	0.37	HR
And								80.00	83.00	3.00	0.68	HR
And								102.20	105.20	3.00	0.89	HR
And								119.90	126.00	6.10	0.63	HR
And								215.00	219.00	4.00	0.66	HR
And								227.40	244.00	16.60	1.28	HR
Incl.								233.00	236.00	3.00	3.01	HR
BBD1403	P8P9	727669	1350789	291	-50	312	240	4.00	30.00	26.00	0.37	OX
And								92.80	97.00	4.20	0.69	HR
And								123.00	132.00	9.00	0.76	HR
BBD1404	P16 N	729666	1344998	261	-52	270	186	103.00	104.00	1.00	1.24	HR
BBD1405	P16 N	729581	1344897	261	-50	269	228	88.00	100.00	12.00	2.68	HR
Incl.								99.00	100.00	1.00	27.31	HR
And								107.00	111.00	4.00	0.48	HR
And								125.00	130.00	5.00	1.72	HR
Incl.								125.00	128.00	3.00	2.69	HR
And								147.00	151.00	4.00	0.41	HR
And								185.00	191.00	6.00	0.43	HR
And								207.00	213.00	6.00	2.83	HR
Incl.								207.00	211.00	4.00	3.92	HR
BBD1406	P17 S	730207	1343149	260	-50	270	81	59.50	67.50	8.00	0.59	HR
And								71.00	72.00	1.00	7.55	HR
BBD1407	P17 S	730209	1343099	260	-49	270	87	54.00	56.00	2.00	1.36	HR
BBD1408	P17 S	730212	1343201	260	-50	271	105	10.00	15.00	5.00	2.04	HR
Incl.								14.20	15.00	0.80	5.20	HR
And								37.00	44.00	7.00	0.51	HR
And								48.00	67.00	19.00	1.39	HR
Incl.								64.00	67.00	3.00	4.97	HR
BBD1409	P17 S	730118	1342899	259	-54	271	81	55.00	66.30	11.30	4.00	HR
Incl.								60.40	61.20	0.80	3.98	HR
BBD1410	P17 S	730231	1343149	261	-50	270	114	87.00	88.00	1.00	4.18	HR
BBD1411	P17 S	730250	1343200	261	-49	270	153	19.00	27.30	8.30	3.81	HR
Incl.								24.00	27.30	3.30	9.14	HR
And								114.00	122.00	8.00	0.77	HR
And								130.00	143.00	13.00	1.19	HR
Incl.								137.00	141.00	4.00	2.67	HR
BBD1412	P17 S	730045	1343156	260	-49	269	120				NSR	
BBD1413	SIGA S	728774	1344504	259	-49	250	168				NSR	
BBD1414	P16 N	729545	1344850	261	-51	269	207	75.50	80.10	4.60	4.88	HR
Incl.								76.50	77.50	1.00	12.69	HR
And								150.00	155.00	5.00	0.49	HR
BBD1415	SIGA S	729375	1345629	261	-50	251	141	11.00	27.00	16.00	0.45	OX
And								99.00	104.00	5.00	1.17	HR
BBD1416	P8P9	727575	1350670	297	-49	311	255	76.80	83.00	6.20	0.70	HR
BBD1417	P16 N	729514	1344903	261	-50	270	198	86.00	91.00	5.00	0.73	HR
And								154.00	157.90	3.90	0.52	HR
And								180.70	184.15	3.45	0.72	HR

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
BBD1418	P16 N	729562	1344952	261	-51	271	255	27.00	32.00	5.00	0.41	HR
And								44.00	56.00	12.00	4.32	HR
Incl.								48.00	54.00	6.00	8.34	HR
And								149.00	153.30	4.30	0.41	HR
And								181.00	186.00	5.00	0.36	HR
BBD1419	P16 N	729626	1344949	261	-51	270	204				NSR	
BBD1420	P16 N	729680	1345099	261	-49	270	204	168.00	169.00	1.00	4.41	HR
BBD1421	P16 N	729369	1345049	261	-49	270	120	94.70	95.80	1.10	0.74	HR
BBD1422	P16 N	729480	1344851	261	-51	272	159	64.40	66.00	1.60	0.77	HR
And								132.00	135.20	3.20	3.79	HR
Incl.								132.80	135.20	2.40	4.37	HR
BBD1423	P16 N	729580	1344800	261	-50	269	243	44.00	49.00	5.00	0.52	HR
BBD1424	P16 N	729528	1344750	261	-50	268	165	29.00	30.00	1.00	0.58	OX
BBD1425	P17 S	730448	1343253	261	-51	270	261				NSR	
BBD1426	P17 S	730286	1343250	260	-51	271	189	11.35	13.00	1.65	1.62	HR
And								21.00	25.00	4.00	1.27	HR
And								39.00	41.00	2.00	2.44	HR
And								50.00	55.00	5.00	1.61	HR
Incl.								53.00	54.00	1.00	3.57	HR
And								76.00	78.00	2.00	1.81	HR
And								91.00	93.20	2.20	1.01	HR
And								106.00	112.00	6.00	2.22	HR
Incl.								110.90	112.00	1.10	10.79	HR
And								170.00	177.00	7.00	0.88	HR
And								181.00	188.00	7.00	1.39	HR
Incl.								186.00	188.00	2.00	2.83	HR
BBD1427	P17 S	730219	1343251	260	-50	271	120	34.00	39.00	5.00	0.30	HR
BBD1428	P17 S	730354	1343424	262	-50	271	228	107.00	110.00	3.00	0.72	HR
And								139.00	141.00	2.00	2.49	HR
And								168.00	175.00	7.00	2.03	HR
Incl.								173.00	174.00	1.00	10.70	HR
BBD1429	P17 S	730348	1343375	261	-51	271	300	71.30	76.00	4.70	0.72	HR
And								89.00	95.00	6.00	0.57	HR
And								100.00	102.00	2.00	1.44	HR
And								111.00	113.00	2.00	0.95	HR
And								136.00	137.00	1.00	3.24	HR
And								146.00	149.00	3.00	4.92	HR
And								161.00	171.00	10.00	0.81	HR
And								215.00	216.90	1.90	2.03	HR
And								281.00	292.60	11.60	0.89	HR
Incl.								285.00	287.00	2.00	3.05	HR
BBD1430	P17 S	730340	1343325	261	-50	270	300	29.00	34.00	5.00	0.65	HR
And								40.00	52.00	12.00	1.70	HR
Incl.								43.00	48.00	5.00	3.37	HR
And								57.00	62.00	5.00	2.16	HR
Incl.								59.00	62.00	3.00	3.16	HR
And								68.00	102.00	34.00	1.26	HR
Incl.								68.00	70.00	2.00	5.46	HR
And								91.00	93.00	2.00	5.29	HR
And								125.00	134.00	9.00	1.47	HR
Incl.								131.00	133.00	2.00	3.81	HR
And								151.00	158.00	7.00	0.71	HR
BBD1431	P17 S	730310	1343175	261	-51	271	348	31.40	34.60	3.20	0.85	HR
And								47.60	59.00	11.40	0.95	HR
And								105.00	115.20	10.20	0.88	HR
And								296.00	301.00	5.00	1.99	HR
Incl.								299.00	300.00	1.00	5.04	HR
BBD1432	P17 S	730335	1342825	252	-54	270	186	137.00	144.90	7.90	1.71	HR
Incl.								139.00	143.00	4.00	2.07	HR
BBD1433	P17 S	730220	1343300	261	-49	269	135				NSR	
BBD1434	P17 S	730322	1343448	262	-49	271	303				NSR	

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
BBD1435	SIGA S	729042	1344809	262	-49	253	221	199.00	206.00	7.00	0.30	HR
BBD1436	SIGA S	728744	1344917	263	-50	250	225	31.00	36.00	5.00	0.34	HR
And								60.30	67.30	7.00	1.17	HR
Incl.								62.00	63.00	1.00	4.72	HR
And								123.00	128.00	5.00	0.45	HR
And								142.80	148.00	5.20	0.45	HR
And								166.90	195.90	29.00	0.51	HR
And								199.30	211.00	11.70	0.43	HR
BBD1437	SIGA S	728702	1344955	264	-50	249	191	8.00	41.00	33.00	0.46	OX
And								88.00	114.00	26.00	1.74	HR
Incl.								97.00	103.00	6.00	3.33	HR
And								152.00	167.30	15.30	14.64	HR
Incl.								154.00	155.00	1.00	223.25	HR
And								174.00	189.70	15.70	0.45	HR
BBD1438	SIGA S	728635	1345297	269	-45	250	248	30.00	34.00	4.00	0.62	HR
And								52.00	59.00	7.00	0.63	HR
And								100.00	112.00	12.00	0.49	HR
And								151.80	179.00	27.20	1.08	HR
Incl.								165.00	178.00	13.00	1.60	HR
And								188.00	193.00	5.00	1.31	HR
And								228.00	231.00	3.00	0.60	HR
BBD1439	SIGA S	728703	1345000	265	-50	250	231	113.00	126.40	13.40	1.09	HR
Incl.								123.00	126.40	3.40	2.79	HR
And								163.00	199.00	36.00	0.72	HR
Incl.								178.00	180.00	2.00	3.32	HR
BBD1440	SIGA S	728672	1345634	269	-53	251	351	2.00	18.00	16.00	0.45	OX
And								47.00	54.00	7.00	0.38	HR
And								105.00	114.00	9.00	0.40	HR
And								119.00	124.00	5.00	0.42	HR
And								252.00	256.00	4.00	0.53	HR
And								264.00	271.00	7.00	0.59	HR
And								299.00	308.00	9.00	0.57	HR
And								328.00	344.00	16.00	1.60	HR
Incl.								336.00	343.00	7.00	2.96	HR
BBD1441	SIGA S	728642	1345623	269	-48	249	180	10.70	15.00	4.30	0.46	OX
BBD1442	SIGA S	728629	1345828	267	-51	253	321	78.40	86.00	7.60	0.32	HR
And								147.00	153.00	6.00	0.31	HR
And								165.00	168.00	3.00	0.48	HR
And								233.00	245.00	12.00	0.38	HR
And								303.00	321.00	18.00	0.89	HR
Incl.								312.00	317.00	5.00	1.62	HR
BBD1444	SIGA S	728576	1345919	265	-55	248	300	6.00	20.50	14.50	0.57	OX
And								92.10	95.40	3.30	2.13	HR
And								118.00	127.00	9.00	0.52	HR
And								212.00	220.00	8.00	0.71	HR
And								255.80	261.20	5.40	1.57	HR
And								266.00	283.00	17.00	0.50	HR
BBD1448	SIGA S	728364	1346161	263	-50	253	231	75.75	91.00	15.25	0.57	HR
And								111.00	122.00	11.00	0.42	HR
And								137.00	143.00	6.00	0.99	HR
And								157.00	164.00	7.00	0.32	HR
And								185.00	191.20	6.20	0.94	HR
BBD1451	NORTH	728853	1353894	279	-50	312	240	171.00	174.00	3.00	0.50	HR
And								178.00	199.10	21.10	0.57	HR
And								217.00	231.00	14.00	0.95	HR
BBD1452	NORTH	728810	1353863	279	-50	313	261	7.00	14.00	7.00	0.26	OX
And								178.00	188.00	10.00	0.67	HR
And								227.00	233.00	6.00	2.31	HR
Incl.								227.00	228.00	1.00	9.98	HR
BBD1454	NORTH	728744	1353859	277	-51	311	210	32.00	36.00	4.00	0.79	HR
And								63.50	67.00	3.50	1.26	HR
And								110.00	113.00	3.00	0.52	HR

Hole	Zone	Easting (m)	Northing (m)	Elv. (m)	Dip (deg.)	Azi. (deg.)	EOH (m)	From (m)	To (m)	Length* (m)	Grade (g/t Au)	Type
And								189.40	199.00	9.60	0.68	HR
BBD1455	NORTH	728363	1353459	271	-50	313	270	62.00	68.00	6.00	0.69	HR
And								141.00	145.00	4.00	0.55	HR

*True width of mineralized intercept to drill core length: Siga 80-100%, P8P9 & P17 75-85%, North Zone 60-80%, P16 yet to be determined

ABOUT OREZONE GOLD CORPORATION

Orezone Gold is an emerging intermediate gold producer with operations in Canada and West Africa. Its Casa Berardi and Bomboré gold mines host significant mineral endowments, growth opportunities, and exploration upside. The recently acquired Casa Berardi mine in Quebec has produced over 3.2 million oz of gold to-date while the Bomboré mine was constructed and brought into production by Orezone in late 2022.

Orezone is led by an experienced management team committed to safe, sustainable, and responsible mining practices, with a focus on delivering long-term value for all stakeholders.

CONTACT INFORMATION

Patrick Downey
President and Chief Executive Officer

Amanda Mallough
Vice President, Investor Relations

Tel: 1 778 945 8977
info@orezone.com / www.orezone.com

For further information please contact Orezone at +1 (778) 945-8977 or visit the Company's website at www.orezone.com.

The Toronto Stock Exchange neither approves nor disapproves the information contained in this news release.

This announcement was authorized for release by Patrick Downey, Director, President & CEO.

Qualified Person and Competent Persons Statement

Alastair Gallagher (CGeol), Exploration Manager for Orezone, is the Qualified Person under NI 43-101 and has reviewed and approved the scientific and technical information contained in this news release.

Information in this press release that relates to grade control drilling and exploration results is based on, and fairly represents, information and supporting documentation prepared by Mr. Gallagher, a Competent Person who is a Member of the Geological Society of London. Mr. Gallagher has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (JORC Code). Mr. Gallagher is an employee of the Company and consents to the inclusion in this announcement of all technical statements based on his information in the form and context in which it appears.

Cautionary Note Regarding Forward-Looking Statements

This news release contains certain information that may constitute "forward-looking information" within the meaning of applicable Canadian securities laws and "forward-looking statements" within the meaning of applicable U.S. securities laws (collectively, "forward-looking statements"). Forward-looking statements are frequently characterized by words such as "expect", "anticipate", "believe", "plan", "intend", "estimate", "potential", "continue", "may", "will", "could", "would" and similar expressions, or statements that certain actions, events or results "may", "could", "would" or "will" occur.

Forward-looking statements in this news release include, but are not limited to, statements regarding: the continuity, extent and potential expansion of mineralization at Bomboré; the potential for future Mineral Resource and Mineral Reserve growth; the expected timing of an updated Mineral Resource and Mineral Reserve estimate in the first quarter of 2027; the incorporation of approximately 100,000 metres of drilling into the updated estimate; the expected impact of revised cut-off grades; the potential to extend the mine life at Bomboré; the delineation and continuity of higher-grade mineralized zones; the potential for future underground mining opportunities; the timing, scope and results of current and future drilling programs; future pit optimizations; the conversion of Inferred Mineral Resources to the Indicated category; and the Company's exploration plans, objectives and expenditures.

All forward-looking statements are based on assumptions that management believes are reasonable at the time such statements are made, including, without limitation, assumptions regarding the continuity of mineralization, the accuracy of geological interpretations, the results of current and future exploration programs, the completion of resource modelling and estimation work, the completion of pit optimization and mine planning studies, gold prices, operating costs, exchange rates, permitting, political and regulatory conditions, and the availability of labour, equipment and supplies.

Forward-looking statements are subject to a variety of known and unknown risks, uncertainties and other factors that could cause actual results to differ materially from those expressed or implied by such forward-looking statements. These risks and uncertainties include, without limitation: exploration results not supporting future Mineral Resource or Mineral Reserve estimates; geological, technical or metallurgical uncertainties; changes in mineral resource estimation assumptions; fluctuations in gold prices, foreign exchange rates and operating costs; delays in obtaining permits or regulatory approvals; changes in applicable laws or regulations; political and security risks in Burkina Faso; the availability of financing, labour, equipment and supplies; community relations; environmental and climate-related risks; operational risks; and the other risks described in the Company's Annual Information Form and Management's Discussion and Analysis filed under the Company's profile on SEDAR+ at www.sedarplus.ca.

Although Orezone believes that the expectations reflected in the forward-looking statements contained in this news release are reasonable, there can be no assurance that such expectations will prove to be correct. Readers are cautioned not to place undue reliance on forward-looking statements, which speak only as of the date of this news release. Except as required by applicable securities laws, Orezone undertakes no obligation to update or revise any forward-looking statements, whether as a result of new information, future events or otherwise.

JORC Code, 2012 Edition

All dollar amounts are in USD unless otherwise indicated

Section 1 – Sampling Techniques and Data

Criteria	JORC Code Explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- Reverse circulation (RC) drill samples are collected every metre for the entire length of the borehole. All material from each meter was sampled via conical splitter attached to the RC rig cyclone. This produces a 2-3kg sub-sample which is collected in a prelabelled sample bag with sequential sample numbers. - Historical RC sampling includes collecting the cyclone underflow sample, splitting in a rotary sample divider to generate a RC sub-sample with a mass of ± 2.1 kg. - HQ and NQ drill core samples are collected from half-drill core cut evenly lengthwise with a diamond saw at regular 1 m intervals. Sampling per geological contacts is permitted ± 0.2m either side of the meter mark. Samples are numbered and bagged before dispatch to the laboratory. Samples were consistently cut on a nominal 10 degree rotation from the orientation line mark on the core (where orientation available, otherwise a consistent cut-line is established) and the non-orientation/cut-line marked side of the core is submitted for assay. - Samples were submitted to BIGS Laboratory in Ouagadougou after drying, the entire sample is crushed to 6 mm and pulverised to achieve 85% passing 106 μm. The pulverised samples are returned to site and rotary split to 1 kg for use as original samples and duplicates. Samples are returned to BIGS for Au determination by 1kg LeachWELL with atomic absorption spectrometry (AAS) finish.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	- RC drilling was undertaken using a contractor owned rig with auxiliary air. 4" or 4 1/2" face sampling hammers are used. - Diamond drill core material from both surface drilling and pre-collars is collected from a combination of HQ and NQ diameter diamond drilling (collaring in HQ and change over to NQ diameter in fresh rock) obtained by wireline drilling with standard tube. - Core orientations were completed using Reflex ACT III RD and ACTx orientation tools with the orientation line marked up at the rig side and reviewed by geologists in the core shed.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Diamond core recoveries are measured in the core trays and recorded as recovered meters and recovered % as part of the geological logging process. RC sample recovery was qualitatively logged with weights of bulk samples recorded at the rig side. - Sample recovery and integrity was maximised by drilling with sufficient air pressure to maintain dry samples with holes stopped if significant water ingress. Dry, moist or wet samples are recorded in the database. - Examination of the RC and DD composite grade distributions suggests a slight positive bias between the RC and DD composite sample populations at grades < 0.15 g/t, and a negative bias between these two populations at grades higher than 0.20 g/t. These biases are not considered critical, and no correction factors were applied.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Logging protocols were followed to a level of detail suitable for support of the Mineral Resource and Ore Reserve estimate. Both RC chip samples and core samples include quantitative analysis (Niton XRF) and photographs. Core sample logging included qualitative data such as lithology,

Criteria	JORC Code Explanation	Commentary
	- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. - The total length and percentage of the relevant intersections logged.	- weathering intensity, competence (RQD) and discontinuities. - All reported drilling is logged in its entirety.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Core samples are collected from half-drill core cut lengthwise with a diamond saw. - RC samples representing a 1/8 split of each meter drilled are collected from a rig-mounted cone splitter. Drilling is discontinued if dry sample is unable to be maintained. - Field duplicates are collected from the RC rig splitter and inserted into the regular sample stream every 50 samples. Mineralised RC field duplicates for 2025 drilling are within 1 % of the original split. Lab-aware pulp duplicates are inserted every 25 samples for diamond core samples. - For both RC and DD samples, the entire sample is crushed and pulverised with >85% passing 75microns. - The 2-3 kg sample size is deemed appropriate given that the gold occurs as fine grained electrum.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	- Reviews of the sampling, analytical, and quality assurance and quality control (QA/QC) protocols used on the RC and core programs have been completed and acceptable levels of accuracy have been achieved. - No geophysical tools, spectrometers, or handheld XRF instruments have been used in the reported exploration results to determine chemical composition at a semi-quantitative level of accuracy. Assaying for gold is by the LeachWELL bottle roll cyanide leach method. Gold content in the solution is determined using atomic absorption analysis. For all the samples having liquor grade >0.2 g/t Au, the tail is washed, dried and a 50 g charge is split and submitted for assaying using a conventional fire assay procedure on 50 g sub-sample. - The QA/QC protocol since 2011 is to submit 2% Blind Field Duplicates, 3% Blind Pulp Duplicates, 5% Lab Aware Pulp Duplicates, 2% Blind Blanks and 3% Blind Standards. - The laboratory inserted commercial standards and completed repeat assays. Repeat or duplicate analysis for samples shows that the precision of samples is within acceptable limits, and a review of results from both laboratory and Company inserted commercial standards indicate acceptable levels of accuracy have been established.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- The Competent Person has confirmed the sample preparation, security, analytical procedures and QA/QC undertaken are adequate for the purposes of Mineral Resource estimation and that there are no factors that materially impact the reliability or accuracy of the dataset employed in the calculation. - Data acquisition is completed on a combination of paper log sheets, and entry into a self-validating data entry software package (LogChief). Integrated datasets have been uploaded to the Company's SQL hosted database and archived on physical back-up drives. - There are no twinned holes. - Below detection limit values (negatives) have been replaced by background values.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- The borehole collars are spotted in the field and pegged using a differential global positioning system (DGPS) set to achieve sub-metre accuracy. Post drilling, the completed holes are surveyed by Bomboré mine surveyors using Trimble GNSS with correction by real time kinematic (RTK) to ensure sub decimeter accuracy. - Grid system is based on the UTM30N grid on the WGS84 ellipsoid. Down hole surveys were undertaken by the

Criteria	JORC Code Explanation	Commentary
		Company using a Reflex Ez-Trac tool and Reflex OMNI Gyro with readings measured in continuous and multishot mode with readings taken between 10-30m. Holes are validated in IMDEX Hub prior to inclusion in the drillhole database. Azimuths measured using magnetic fields are converted to a geographic azimuth using the declination applicable at the time of the survey.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Data spacing is variable across the deposit, ranging from 50x50m at the periphery to 25x25m in the more densely drilled core. - The oxide resources have been defined along 50 m-spaced drill sections with 25 m between the drill collars. The hard rock resources have been defined generally along 50 m-spaced drill sections with 50 m between the drill collars. - Drill samples were composited to 1m for use in resource estimation. Mining at Bomboré has demonstrated reasonable continuity over a strike of 10 km at a cut-off grade of 0.15 g/t Au. At this cut-off grade, the gold mineralisation forms corridors 500 m to 1,000 m in length and 10 m to 100 m in width. At a cut-off grade of 0.5 g/t Au, the higher-grade subdomains have a strike length of up to 500 m and a width typically between 5 m and 30 m. - Support of the strong continuity of mineralisation along strike has been confirmed by mining production and mapping of pit walls and floors.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- In all areas, the drilling direction is opposite to the dip and orthogonal to the average strike of the lithological units, major fabrics, and wireframed mineralised domains. The plunge of the boreholes at the collar is generally 50° ±5°, thereby intersecting the lithological units, major fabric and wireframed mineralised domains at an angle between 65° and 90°. - No sampling bias was deemed to have occurred.
Sample security	The measures taken to ensure sample security.	Strict security measures are applied throughout the sampling, sample preparation, and analytical stages. The RC samples and the drill core retrieved by the drillers are collected and handled at the drill site by Orezone personnel. The sample bags are transported by a dedicated driver to a secure storage area in the Bomboré Gold Project area. The sample storage area at the Bomboré Gold Project is fenced and a watchman provides full-time security. Finally, the samples are dispatched to the analytical laboratories under the direct control of Orezone staff, who monitor the preparation and shipment of the samples. This procedure ensures reasonable chain of custody by Orezone from the drill sites to the analytical laboratory.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	In 2017, Mr Yassa collected 50 samples from 15 RC boreholes and 35 cored boreholes during the site visit for independent analysis of gold content. There was a good correlation between the independently collected verification samples analysed at SGS and the Orezone data.

Section 2 – Reporting of Exploration Results

Criteria	JORC Code Explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Project covers an area of 12,963 ha and consists of one Industrial Operating Permit (the Bomboré Mining Permit) of 2,887 ha, surrounded by four Mining Exploration Permits: the Bomboré II Exploration Permit of 1,265 ha, the Bomboré III Exploration Permit of 3,360 ha, the Bomboré IV Exploration Permit of 833 ha and the Bomboré V permit of 4,618 ha. - The Bomboré Mining Permit is registered in the name of Orezone Bomboré S.A. (OBSA), a 90%-owned subsidiary of Orezone Inc. S.A.R.L., itself a 100%-owned subsidiary of Orezone Inc., which is 100% owned by Orezone. The Bomboré Mining Permit was granted to OBSA by way of Decree No. 2016-1266/PRES/PM/MEMC/MINEFID/MEEVCC dated 30 December 2016 and is valid for an initial tenure of 10.7 years but can be extended if the mine life is extended beyond what was initially applied for. - All mining ventures in Burkina Faso are subject to a 10% free carried interest and a royalty on gold sold in favour of the Government of Burkina Faso, upon the award of an operating permit from the government.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Between 1989 and 2000, mineral exploration programs were completed by La Générale des Mines et des Carrières (GMC), Channel, Solomon, and Placer Dome. A total of 1,271 core, RC and rotary air blast (RAB) boreholes were completed. Channel completed 10 diamond boreholes for approximately 1,100 m, 261 RC boreholes for approximately 20,000 m, and 1,000 RAB boreholes for approximately 34,000 m.
Geology	Deposit type, geological setting and style of mineralisation.	- Bomboré is an orogenic gold deposit, exhibiting structural control and associated hydrothermal alteration mineral assemblages. The deposit represents a large tonnage, low-grade gold mineralisation system similar to other Birimian gold deposits, such as Kiaka in Burkina Faso, Damang, Yamfo-Selwi in Ghana, and Sadiola in Mali. - The geological setting is part of a northeast–southwest trending greenstone belt extending for 50 km. The permit area is underlain mainly by a metasedimentary flysch-type sequence dominated by metasandstones with subordinate carbonaceous meta-pelites and polymictic metaconglomerates. - The Bomboré gold deposits occur within a major north to northeast trending structure. The gold deposits were discovered by tracing gold-in-soil anomalies to bedrock by drilling. Gold mineralisation is associated with arrays of structurally controlled quartz veins and veinlets and attendant silica, sulphide, and carbonate alteration.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- The Bomboré mine commenced production in 2022. - The Mineral Resource estimate includes a total of 6,322 RC drill holes and 1,426 diamond drill core holes. - The Competent Person has determined that the detailed information on the drill holes is not material and does not detract from the understanding of the report.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	- All intersections are assayed on predominantly 1 m intervals and no top-cuts are applied to exploration results. - Reporting of mineralised intervals is based on a lower cut-off grade of 0.28 g/t in the Oxide+Upper Transition zone,

Criteria	JORC Code Explanation	Commentary
	- Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	and 0.45 g/t Au in the Lower Transition+Hard Rock zone, with a minimal width of 1.5 m and up to a maximum of 3.0 m of dilution being included.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	- The majority of the drilling was planned to intersect mineralisation in a perpendicular manner or as close as practicable. - The true width of the mineralisation to drill core length: -Siga: 80-100% -P8P8 & P17: 75-85% -North Zone: 60-80% -P16: Yet to be determined
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate diagrams have been included for reporting of significant intercepts.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All grades, high and low, are reported accurately with 'from' and 'to' depths and 'hole identification' shown.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All material exploration data including metallurgical test results have been reported.
Further work	- The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- In 2024 Orezone designed an initial 30,000 m first pass exploration drill program, that will test multiple targets across the greater than 14 km long mineralised system. This initial program will be used to refine target priority for subsequent exploration drilling in this multi-year campaign, as well as to advance the project's evolving structural framework. Phase 1 of this initial program will be centred on the North Zone and thereafter, drilling will progressively advance towards the southern half of the mining lease. - First pass drilling along the Bomboré Shear Zone (BSZ) will be focused on testing the potential of the mineralised system to depths of up to 400 m. While drilling will be wide spaced in nature, the objective will be to increase pit depths longer-term, as well as to illustrate the broad continuity of multiple higher grade plunging zones of mineralisation that are well defined by shallower drilling and current mining operations. These higher-grade plunging sub-zones may further support an underground mining scenario later in the project's mine life, once high-grade near-surface open pits are depleted.